




TECHNICAL DATA SHEET

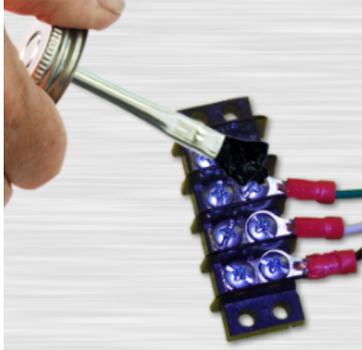

NAME: LIQUID ELECTRICAL TAPE

PART NUMBER(S): AM881

PRODUCT DESCRIPTION:

Liquid Electrical Tape forms a protective dielectric coating on electrical connections to seal out moisture and prevent corrosion. It adheres to all metal, plastic, vinyl, rubber, and composite surfaces. This product will also stop terminal screws from loosening due to vibration and is safe and easy to use, fast drying and UL tested.

Features and Benefits:

- Forms an airtight, protective, waterproof, UV resistant, dielectric coating.
- Prevents corrosion on wires and terminals, protects against vibration.
- Patented, UL-tested, fast drying formula
- Can be built-up with additional layers
- Great flexibility
- Adheres to all metal, plastic, vinyl, rubber and composite surfaces
- Stops terminal screws from loosening due to vibration
- Can be applied to irregular shaped and hard to reach connections
- Will not peel or unravel
- Service range -50°F to +275°F
- Dielectric strength of 1,276 volts/mil after curing

Use on:

- Bilge pumps
- Outdoor exposed wiring
- Sprinkler pumps
- Timers
- Underground wiring
- Outdoor lighting fixtures
- Instruments
- Anywhere a weatherproof and dependable connection is needed

Directions:

Stir well before using. Wires or terminal to be sealed must be clean and dry. Brush or dip Liquid Electrical Tape on electrical connection area. Allow to dry for 5 minutes and apply second coat if greater thickness of seal is needed. Succeeding coats may be applied at 5 minute intervals to build up extremely thick protection. Product fully cures in 24 hours.

Size:

4oz

Color:

Clear

Quantities:

10 UNITS/CASE



WWW.GREENCHEMLABS.COM

CUSTOMER SERVICE: 1-800-946-3151 | FAX: 1-800-336-9068

